Split System Submittal Data

Indoor: **CS-MKS7NKU**

Multi System Indoor Units - Wall Mounted

Job Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Approval: _____
Date: _____
Construction: _____
Unit#: _____
Drawing#: _____

General Data	
Power (V/P/Hz)	**208 - 230/1/60**
Circuit Ampacity (A)	15
Fuse Size, Max.(A)	20
Running Amps (A)	0.11
Power Input (W)	25
Indoor Unit	
Fan type	Cross Flow
Dia & Length (in.) - No. Speeds	D3-11/16 L24-31/32 -1
No. Speeds	3 & Auto
No. Poles (RPM, High)	8 - 1050
No. Motors (W)	1-(47)
CFM (HI)	241
Operation Sound (HI/Med/Lo/ QT*dB-A)	33/30/27/23
F.L. Amps (A)	0.12
Coil Type	**Aluminum Plate Fin & Copper Tube**
Fin Type - Pipe Type	Slit Plate - Inner Rifled
Rows - F.P.I.	2 - 19.5
Face Area (sq.ft.)	2.02
Tube Size (in)	9/32
Drain Connection Size	23/32
Refrigerant	**R410A**
Line Size (in. O.D. Discharge)	1/4" (Flare)
Line Size (in. O.D. Discharge)	3/8" (Flare)
Dimensions (HxWxD)	
Indoor Unit (Crated) (in.)	13-25/32 x 35-7/16 x 10-1/32
Indoor Unit (Uncrated) (in.)	11-7/32 x 32-15/32 x 7-7/16
Weight (lbs.)	**Indoor**
Net	19.8
Shipping	24.3
Shipping Volume (cu.ft.)	2.8

Performance Data @ ARI Standard Conditions (230V)	
Cooling	
Total Capacity (BTU/H)	500
Moisture Removal (HI, Pint/H)	2.7

Heating	
Total Capacity (A)	7
HSPF (A)	13
Amps (W)	1570
Max. Amps (W)	3000
Power Inputs (W)	50
Max. Inputs (W)	2900
Outdoor Sounds Rating (DB-A)	N/A

Features	
Controls	Microprocessor
Remote Control	LCD Wireless Type, Built-in Temp Sensor
Temperature Control	IC Thermostat
Timer	24 Hr. Program, 1 Hr. Off
Night Setback	Built-In
Air Louver, Horizontal	Manual
Air Louver, Vertical	Automatic
Power Failure Automatic Restart	Built-In
Heating/Cooling Automatic Changeover	
Self-Diagnosis	Built-In
Quiet Operation	Built-In
Ion Generator	N/A
Air Clean Apatite Filer	N/A

Option	
Refrigerant Line Set	Available
Fresh Air Intake	N/A
Airduct Extension	N/A
Indoor Frame Extension	N/A
Condensate Drain Pump	Available
Non-Removeable Remo-con Bracket	Available

Operating Range	Indoor Air Intake Temp	Outdoor Air Intake Temp
Cooling (Max)	95F DB/71F WB	115F DB
Cooling (Min)	67F DB/57F WB	14F DB

Indoor Dimensions

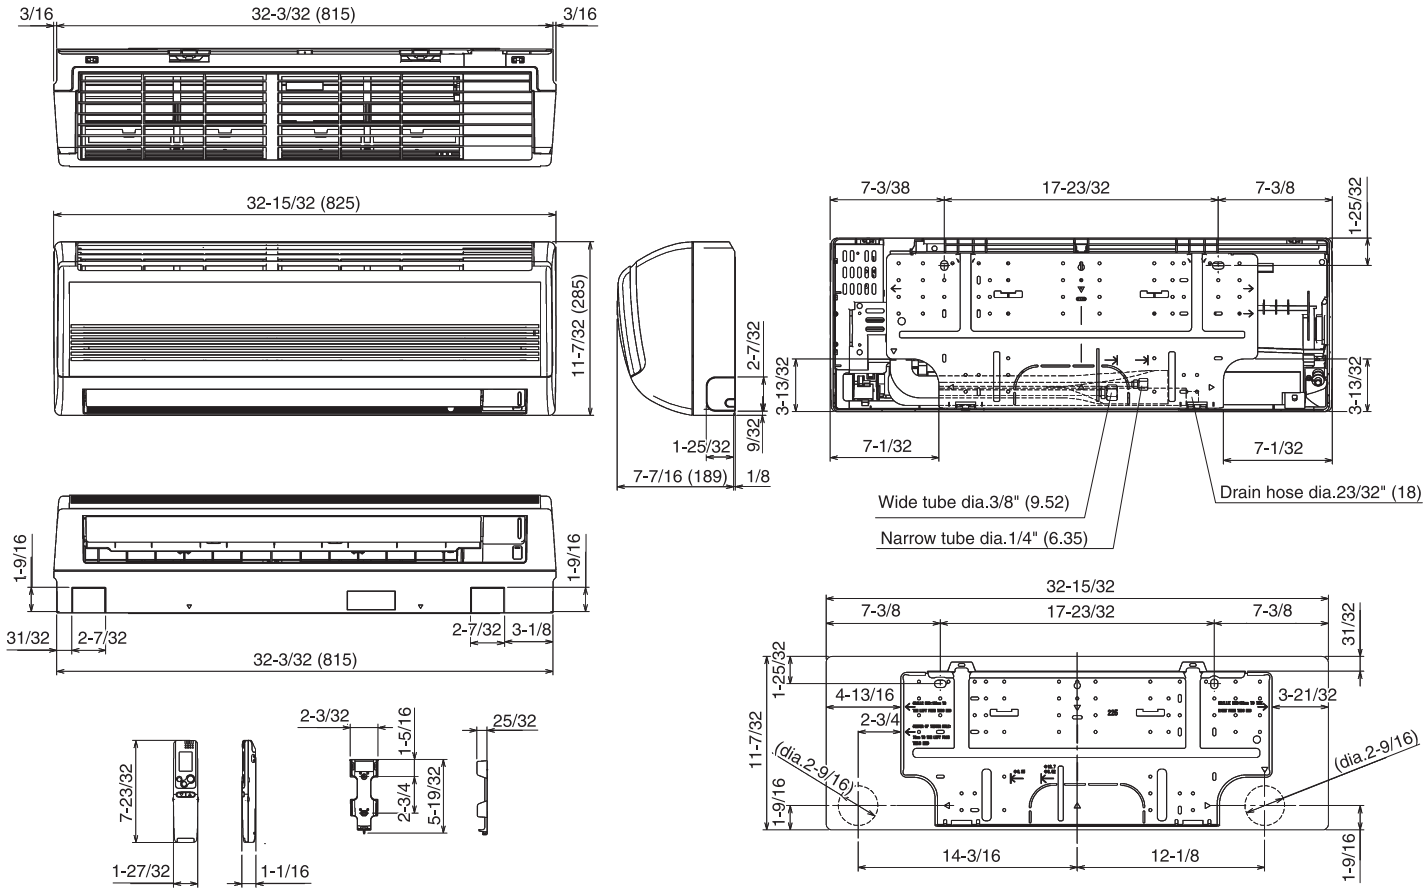

Panasonic

Panasonic North America
Air Conditioning Division
1690 Roberts Blvd., NW, Suite 110
Kennesaw, GA 30144
us.panasonic.com/aircon